












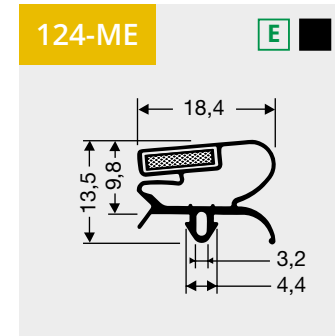









Alt. 306-M

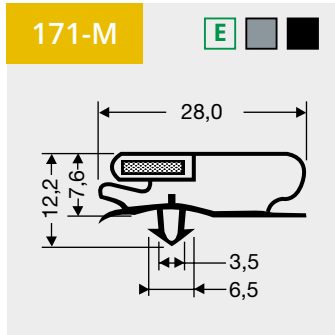



1

Dart profiles with magnet
Available as frame or profile length.

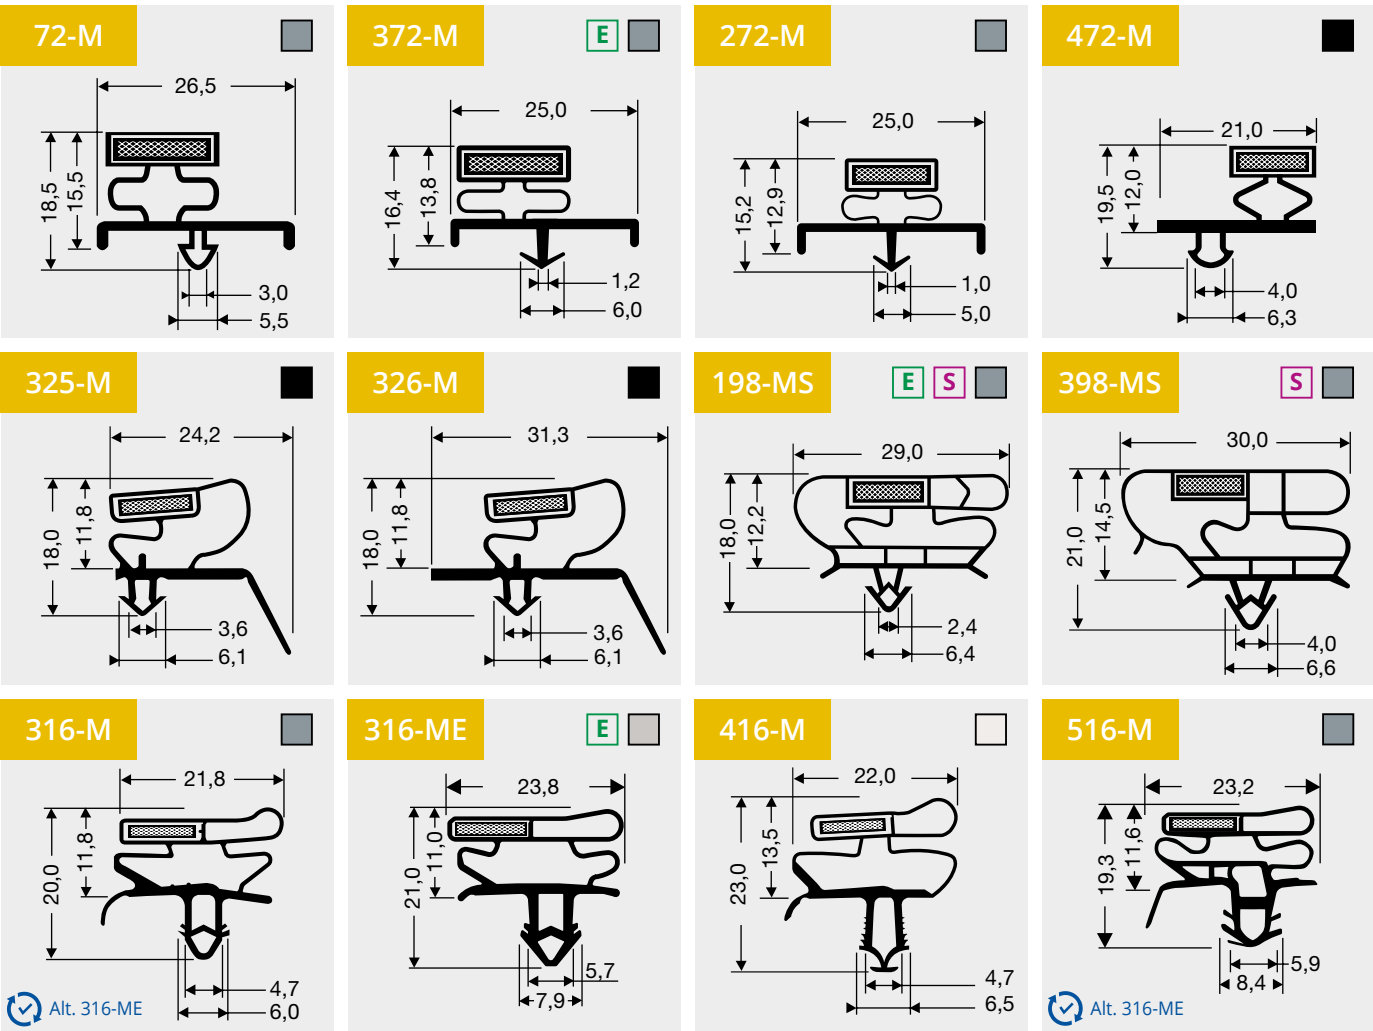

*How to take the dart-to-dart measurements
(C size)*

Remove the seal from the track to take the dart-to-dart measurements.

Measure from the inside edge of the slot on one side to the outside of the slot on the other side.

Scan QR-code for
instructionvideo